

Platinum

TECHNICAL DATA	STANDARD	TAPIFLEX PLATINIUM (SHEET)	ACCZENT PLATINIUM (SHEET)
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	43 Heavy
Wear layer binder content	EN ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Wear layer thickness	EN ISO 24340	1.02 mm	1.02 mm
Total thickness	EN ISO 24346	3.10 mm	2.45 mm
Total weight	EN ISO 23997	3250 g/m ²	3200 g/m ²
Surface treatment		Tektanium®	Tektanium®
Installation method		Glue-down	Glue-down
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 14041	0120-082-DoP-2019-07	0120-083-DoP-2019-07
Reaction to fire	EN 13501-1	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Bfl-s1 glued over any derivate wood substrate
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.04 m ² ·K/W	0.02 m ² ·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0,30)	Class DS (μ ≥ 0,30)
Technical Performances	Norm	Tarkett Value	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Average measured value*: 0.10 mm	Required value: ≤ 0.20 mm Average measured value*: 0.04 mm
Dimensional stability	EN ISO 23999	Average measured value: ≤ 0.10%	Average measured value: ≤ 0.10%
Impact sound reduction - ΔL_w	NF EN ISO 717 / 2	17 dB	9 dB
Reduction of in-room impact noise	NF S31-074	L _{n,e,w} < 65 dB - Class A	L _{n,e,w} < 75 dB - Class B
Slip resistance⁽¹⁾	DIN 51130	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)	Platinum (≤ 10 µg/m ³)
Formaldehyde emission class	EN 717-1	E1	E1
Dimensions and designs	Norm	Tarkett Value	Tarkett Value
Roll		2 x 23 m	2 x 23 m
Number of designs available		35	35

The above information is subject to modification for the benefit of further improvement. (01/24). ⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com Non contractual pictures. The illustrations do not reflect the actual scale of the products.

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



■ WESTERN EUROPE: Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 • Belgium: Tarkett Belux Sprl - Tel. +32 52 26 24 11 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 4257 9000 • France: Tarkett SAS - Tel. +33 1 41 20 42 49
 ■ Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 • Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. - Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 • Netherlands: Tarkett BV - Tel. +31 416 685 491
 ■ Norway: Tarkett AS - Tel. +47 22 20 92 00 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. - Tel. +34 914 951 400 • Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24
 ■ Turkey: Tarkett Turkey - Tel. +90 212 213 65 80 • United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 354 040 ■ EASTERN EUROPE: Baltic Countries: Estonia: Tel. +372 55 51 5880 • Latvia: Tel. +371 26 112014 • Lithuania: Tel. +370 37 262220 • Czech Republic: Tarkett org. slozka - Tel. +420 271 001 600 • Hungary: Tarkett Polska Sp. z o.o. magyarországi fióktelepe - Tel. +36 1 437 8150 • Kazakhstan: Tarkett Kazakhstan - Tel. +7 7172 79 00 99 • Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737
 ■ Slovakia: Tarkett Polska Sp. z o.o. organizačná zložka - Tel. +421 2 48291 317 • South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00
 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 • North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 8750 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 • Israel: Tarkett International: +33 1 41 20 41 01
 ■ NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5611 / Johnsonite - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ LATIN AMERICA: Brazil: Tarkett Brasil - Tel. +55 12 3934 7108 • Argentina - Chile - Uruguay: Tarkett Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 • Mexico / Central America: Tarkett Mexico - Tel. +52 11 98410 9310

Printed on recyclable paper and cardboard

Customs Tariff: 4820500000

Platinum - 206001 0105 - 01/24



Platinum



GLUE-DOWN INSTALLATION

HETEROGENEOUS VINYL ACOUSTIC & COMPACT

Platinum

HETEROGENEOUS VINYL FLOORS

Enduring elegance

professionals.tarkett.com



ENDURING ELEGANCE

ROBUST LONGEVITY HETEROGENEOUS FLOORS

The Platinum Collection's inlaid construction makes this floor particularly well-suited to high traffic areas like healthcare and education buildings, where incessant activity creates particularly demanding environments.

The inlaid design incorporate multiple colours to suggest a sense of depth and robustness that carries timeless quality and durability.

Platinum floors are part of a global solution that includes walls and stairs.

Smooth rolling for heavy loads Choose between 2 profiles




Compact
for extreme resistance




Acoustic 17dB
for optimum sound reduction


Robust colour chart



5 Patterns
Emerging from the inlaid construction



35 Designs
Matt finish



Matching
Floors and walls available in Tarkett's range



Seamless finish
Thanks to unique multicolour welding rods

Responsible flooring



Up to **25%** Recycled content



Recycling* through **ReStart®**



Optimal indoor air quality
≤ 10 µg/m³



NO Phthalates



NO Biocides
NO Heavy Metals

Improved performances



Extreme resistance
Inlaid product construction.
1 mm wear layer on all products.

TEKTANIUM™

Innovative coating for easier cleanability and cost-effective maintenance



Extreme durability and scratch resistance



Improved resistance to stains (ISO 26987 test rated not affected by most substances)



Excellent cleanability :
no residues visible at all (Riboflavin test)

*off-cuts and post-installation recycling



LRV = Light Reflectance Value



Discover more here!



COLLAGE RABAT INTER

PLATINIUM

ICE
beige

A 206027 311
T 206029 311

LRV 55.9%
NCS S 2005-Y



ICE
dark beige

A 206027 314
T 206029 314

LRV 37.0%
NCS S 3005-Y20R



ICE
nude

A 206027 322
T 206029 322

LRV 48.5%
NCS S 2010-Y60R



ICE
terracotta

A 206027 323
T 206029 323

LRV 40.6%
NCS S 2030-Y70R



ICE
fresh yellow

A 206027 319
T 206029 319

LRV 63.4%
NCS S 1030-G90Y



ICE
fresh almond

A 206027 316
T 206029 316

LRV 44.1%
NCS S 3005-G20Y



ICE
fresh green

A 206027 317
T 206029 317

LRV 31.4%
NCS S 3010-B30G



ICE
fresh sky

A 206027 318
T 206029 318


LRV 52.1%
NCS S 1515-R90B



SPRINKLE
neutral

A 206027 333
T 206029 333

LRV 64.0%
NCS S 1502-Y20R



PLAZZA²
beige

A 206027 325
T 206029 325


LRV 56.0%
NCS S 2000-N



SPRINKLE
warm mix

A 206027 334
T 206029 334

LRV 64.0%
NCS S 1502-Y20R



PLAZZA²
coral

A 206027 327
T 206029 327

LRV 56.0%
NCS S 2000-N



PLAZZA²
ochre

A 206027 330
T 206029 330

LRV 56.0%
NCS S 2000-N



PLAZZA²
yellow

A 206027 331
T 206029 331

LRV 56.0%
NCS S 2000-N



PLAZZA²
green

A 206027 329
T 206029 329

LRV 56.0%
NCS S 2000-N



PLAZZA²
dark blue

A 206027 328
T 206029 328


LRV 56.0%
NCS S 2000-N



SPRINKLE
cool mix

A 206027 332
T 206029 332

LRV 64.0%
NCS S 1502-Y20R

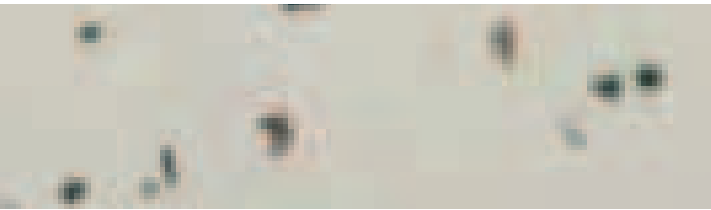

GROUND
grey

A 206027 308
T 206029 308

LRV 18.4%
NCS S 5502-B



GROUND
beige

A 206027 303
T 206029 303

LRV 34.3%
NCS S 4005-Y20R



GROUND
chalk

A 206027 306
T 206029 306

LRV 57.4%
NCS S 2005-Y



GROUND
brick

A 206027 305
T 206029 305

LRV 22.0%
NCS S 4020-Y90R



GROUND
ochre

A 206027 310
T 206029 310

LRV 29.0%
NCS S 4020-Y10R



GROUND
kaki

A 206027 309
T 206029 309

LRV 25.8%
NCS S 5005-G50Y



GROUND
green

A 206027 307
T 206029 307

LRV 17.4%
NCS S 5010-B50G



GROUND
blue

A 206027 304
T 206029 304

LRV 17.1%
NCS S 5020-R90B



GROUND
light blue

A 206027 302
T 206029 302

LRV 44.5%
NCS S 3005-B50G



GROUND
medium grey

A 206027 301
T 206029 301

LRV 32.4%
NCS S 4000-N



GROUND
light grey

A 206027 300
T 206029 300

LRV 47.9%
NCS S 3000-N



ICE
white

A 206027 324
T 206029 324

LRV 62.9%
NCS S 1505-Y20R



ICE
light grey

A 206027 320
T 206029 320


LRV 46.9%
NCS S 2502-Y80R



ICE
medium grey

A 206027 321
T 206029 321


LRV 33.4%
NCS S 3502-Y80R



ICE
dark grey

A 206027 315
T 206029 315


LRV 22.0%
NCS S 5500-N



ICE
black

A 206027 312
T 206029 312

LRV 13.2%
NCS S 6502-R50B

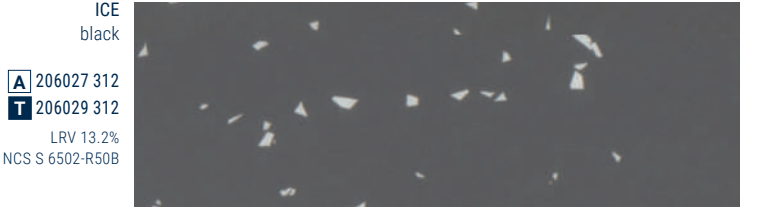

ICE²
black & white

A 206027 313
T 206029 313

LRV 64.0%
NCS S 1502-Y20R



PLAZZA²
black

A 206027 326
T 206029 326

LRV 56.0%
NCS S 2000-N




The colour chart that sets the tone

COLLAGE SUR GARDE

INTER

Design	Colour	NCS	LRV (%)	Accent Platinum		Matching welding rods	
				Accent (Compact) [A]	Tapiflex (Acoustic) [T]	Unicolour	Multicolour
GROUND	beige	S 4005-Y20R	34.3	206027 303	206029 303	✓	✓
	blue	S 5020-R90B	17.1	206027 304	206029 304	✓	✓
	brick	S 4020-Y90R	22.0	206027 305	206029 305	✓	✓
	chalk	S 2005-Y	57.4	206027 306	206029 306	✓	✓
	green	S 5010-B50G	17.4	206027 307	206029 307	✓	✓
	grey	S 5502-B	18.4	206027 308	206029 308	✓	✓
	kaki	S 5005-G50Y	25.8	206027 309	206029 309	✓	✓
	light blue	S 3005-B50G	44.5	206027 302	206029 302	✓	✓
	light grey	S 3000-N	47.9	206027 300	206029 300	✓	✓
	medium grey	S 4000-N	32.4	206027 301	206029 301	✓	✓
	ochre	S 4020-Y10R	29.0	206027 310	206029 310	✓	✓
	ICE	beige	S 2005-Y	55.9	206027 311	206029 311	✓
black		S 6502-R50B	13.2	206027 312	206029 312	✓	✓
dark beige		S 3005-Y20R	37.0	206027 314	206029 314	✓	✓
dark grey		S 5500-N	22.0	206027 315	206029 315	✓	✓
fresh almond		S 3005-G20Y	44.1	206027 316	206029 316	✓	✓
fresh green		S 3010-B30G	31.4	206027 317	206029 317	✓	✓
fresh sky		S 1515-R90B	52.1	206027 318	206029 318	✓	✓
fresh yellow		S 1030-G90Y	63.4	206027 319	206029 319	✓	✓
light grey		S 2502-Y80R	46.9	206027 320	206029 320	✓	✓
medium grey		S 3502-Y80R	33.4	206027 321	206029 321	✓	✓
nude		S 2010-Y60R	48.5	206027 322	206029 322	✓	✓
terracotta		S 2030-Y70R	40.6	206027 323	206029 323	✓	✓
white		S 1505-Y20R	62.9	206027 324	206029 324	✓	✓
ICE*	black & white	S 1502-Y20R	64.0	206027 313	206029 313	✓	✓
PLAZZA*	beige	S 2000-N	56.0	206027 325	206029 325	✓	✓
	black	S 2000-N	56.0	206027 326	206029 326	✓	✓
	coral	S 2000-N	56.0	206027 327	206029 327	✓	✓
	dark blue	S 2000-N	56.0	206027 328	206029 328	✓	✓
	green	S 2000-N	56.0	206027 329	206029 329	✓	✓
	ochre	S 2000-N	56.0	206027 330	206029 330	✓	✓
	yellow	S 2000-N	56.0	206027 331	206029 331	✓	✓
SPRINKLE	cool mix	S 1502-Y20R	64.0	206027 332	206029 332	✓	✓
	neutral	S 1502-Y20R	64.0	206027 333	206029 333	✓	✓
	warm mix	S 1502-Y20R	64.0	206027 334	206029 334	✓	✓

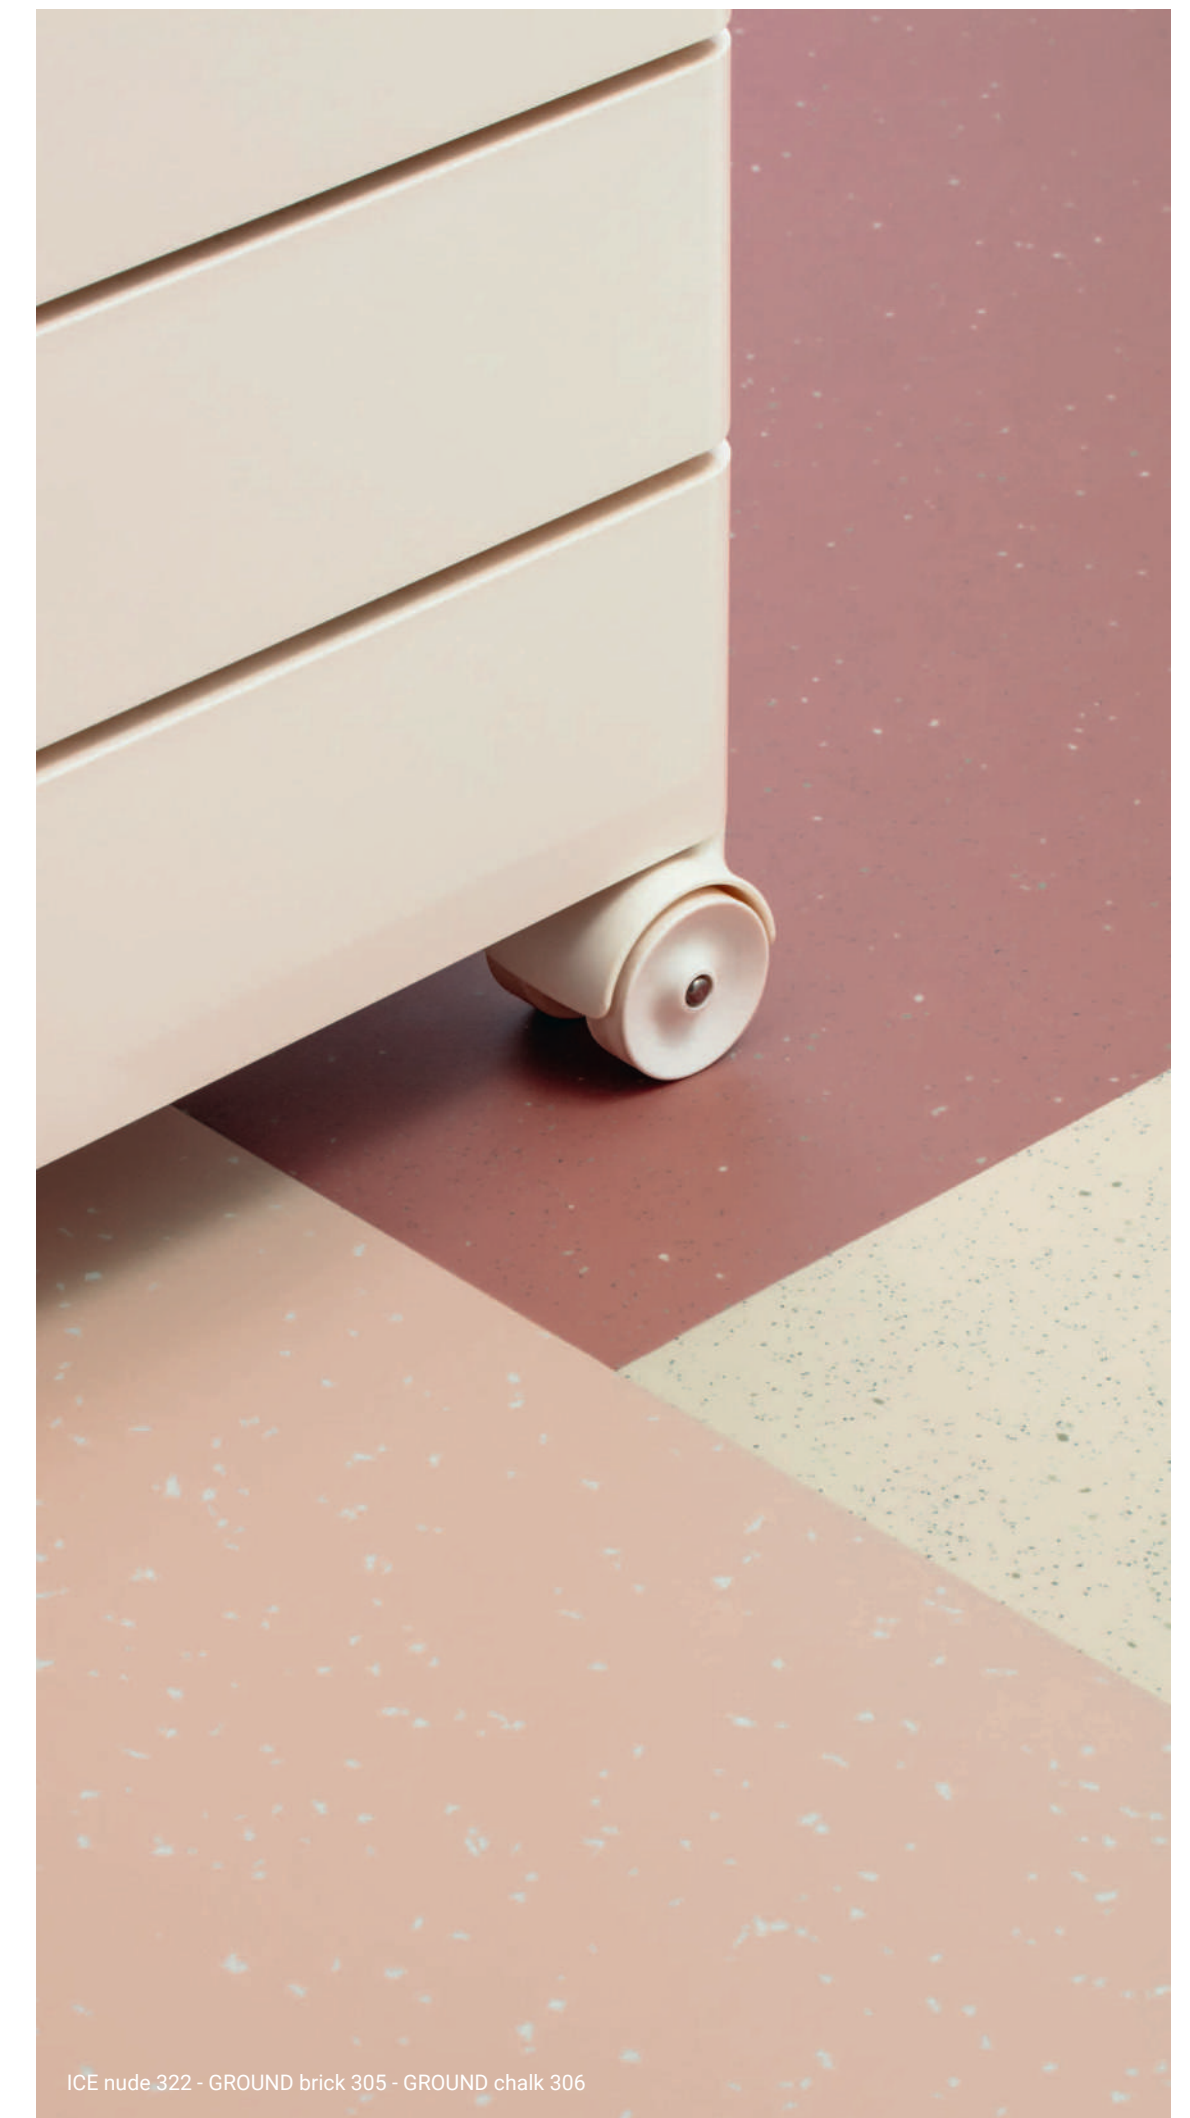

ICE nude.322 - GROUND brick 305 - GROUND chalk 306